

# Modular International, Inc.



50mm, 70mm,  
and 90mm LED  
modules available  
with filter rings,  
shielding cylinders,  
and filter media.



# Modular Multiples®


The Original Multiple Light Family of Fixtures



Available 50mm LED Modules

| Model Number <sup>1</sup> | Watts | Beam Angle | CRI | Lumens <sup>2</sup> | Lumens per watt | Tested K-Temp <sup>3</sup> |
|---------------------------|-------|------------|-----|---------------------|-----------------|----------------------------|
| <b>LEDDW-506-17</b>       | 6.1   | 17°        | 90+ | 482                 | 79              | 3000K                      |
| <b>LEDDW-506-30</b>       | 6.1   | 30°        | 90+ | 481                 | 78              | 3000K                      |
| <b>LEDDW-506-40</b>       | 6.1   | 40°        | 90+ | 475                 | 79              | 3000K                      |
| <b>LEDDW-506-55</b>       | 6.1   | 55°        | 90+ | 426                 | 79              | 3000K                      |
| <b>LEDDW-508-17</b>       | 7.9   | 17°        | 90+ | 668                 | 85              | 3000K                      |
| <b>LEDDW-508-30</b>       | 7.9   | 30°        | 90+ | 671                 | 85              | 3000K                      |
| <b>LEDDW-508-40</b>       | 8     | 40°        | 90+ | 666                 | 83              | 3000K                      |
| <b>LEDDW-508-55</b>       | 8     | 55°        | 90+ | 601                 | 75              | 3000K                      |
| <b>LEDDW-510-17</b>       | 10    | 17°        | 90+ | 856                 | 76              | 3000K                      |
| <b>LEDDW-510-30</b>       | 10    | 30°        | 90+ | 852                 | 84              | 3000K                      |
| <b>LEDDW-510-40</b>       | 10    | 40°        | 90+ | 843                 | 85              | 3000K                      |
| <b>LEDDW-510-55</b>       | 10    | 55°        | 90+ | 763                 | 85              | 3000K                      |
| <b>LEDDW-511-17</b>       | 11.9  | 17°        | 90+ | 1,015               | 85              | 3000K                      |
| <b>LEDDW-511-30</b>       | 11.9  | 30°        | 90+ | 1,021               | 86              | 3000K                      |
| <b>LEDDW-511-40</b>       | 11.9  | 40°        | 90+ | 1,016               | 85              | 3000K                      |
| <b>LEDDW-511-55</b>       | 11.9  | 55°        | 90+ | 918                 | 77              | 3000K                      |

<sup>1</sup> Catalog specification example: LEDDW-511-40



<sup>2</sup> Lumen values are delivered lumen totals.

<sup>3</sup> Kelvin Temperature: 1800°K - 3000°K

# Modular Multiples®

The Original Multiple Light Family of Fixtures




Dim-to-Warm Available 50mm LED Modules

## Beam Details

All information shown below measured with filter ring installed. Filter media and shielding options available.


### LEDDW-511-17

|          |          |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |
|----------|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 1 m      | 2 m      | 3 m     | 4 m     | 5 m     | 6 m     | 7 m     | 8 m     | 9 m     | 10 m    | 11 m    | 12 m    | 13 m    | 14 m    | 15 m    | 16 m    | 17 m    | 18 m    | 19 m    | 20 m    |
| 3.3 ft   | 6.6 ft   | 9.8 ft  | 13.1 ft | 16.4 ft | 19.7 ft | 23.0 ft | 26.2 ft | 29.5 ft | 32.8 ft | 36.1 ft | 39.4 ft | 42.7 ft | 45.9 ft | 49.2 ft | 52.5 ft | 55.8 ft | 59.1 ft | 62.3 ft | 65.6 ft |
| 5355 lx  | 1339 lx  | 595 lx  | 335 lx  | 214 lx  | 149 lx  | 109 lx  | 84 lx   | 66 lx   | 54 lx   | 44 lx   | 37 lx   | 32 lx   | 27 lx   | 24 lx   | 21 lx   | 19 lx   | 17 lx   | 15 lx   | 13 lx   |
| 497.5 fc | 124.4 fc | 55.3 fc | 31.1 fc | 19.9 fc | 13.8 fc | 10.2 fc | 7.8 fc  | 6.1 fc  | 5.0 fc  | 4.1 fc  | 3.5 fc  | 2.9 fc  | 2.5 fc  | 2.2 fc  | 1.9 fc  | 1.7 fc  | 1.5 fc  | 1.4 fc  | 1.2 fc  |

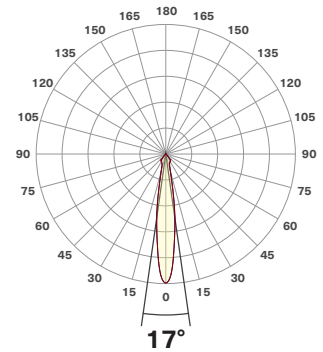


### LEDDW-511-30

|          |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |
|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 1 m      | 2 m     | 3 m     | 4 m     | 5 m     | 6 m     | 7 m     | 8 m     | 9 m     | 10 m    | 11 m    | 12 m    | 13 m    | 14 m    | 15 m    | 16 m    | 17 m    | 18 m    | 19 m    | 20 m    |
| 3.3 ft   | 6.6 ft  | 9.8 ft  | 13.1 ft | 16.4 ft | 19.7 ft | 23.0 ft | 26.2 ft | 29.5 ft | 32.8 ft | 36.1 ft | 39.4 ft | 42.7 ft | 45.9 ft | 49.2 ft | 52.5 ft | 55.8 ft | 59.1 ft | 62.3 ft | 65.6 ft |
| 2245 lx  | 561 lx  | 249 lx  | 140 lx  | 90 lx   | 62 lx   | 46 lx   | 35 lx   | 28 lx   | 22 lx   | 19 lx   | 16 lx   | 13 lx   | 11 lx   | 10 lx   | 9 lx    | 8 lx    | 7 lx    | 6 lx    | 6 lx    |
| 208.6 fc | 52.1 fc | 23.2 fc | 13.0 fc | 8.3 fc  | 5.8 fc  | 4.3 fc  | 3.3 fc  | 2.6 fc  | 2.1 fc  | 1.7 fc  | 1.4 fc  | 1.2 fc  | 1.1 fc  | 0.9 fc  | 0.8 fc  | 0.7 fc  | 0.6 fc  | 0.6 fc  | 0.5 fc  |

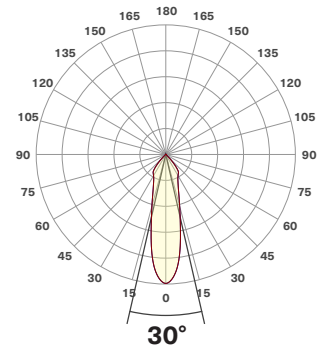


### LEDDW-511-40

|          |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |
|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 1 m      | 2 m     | 3 m     | 4 m     | 5 m     | 6 m     | 7 m     | 8 m     | 9 m     | 10 m    | 11 m    | 12 m    | 13 m    | 14 m    | 15 m    | 16 m    | 17 m    | 18 m    | 19 m    | 20 m    |
| 3.3 ft   | 6.6 ft  | 9.8 ft  | 13.1 ft | 16.4 ft | 19.7 ft | 23.0 ft | 26.2 ft | 29.5 ft | 32.8 ft | 36.1 ft | 39.4 ft | 42.7 ft | 45.9 ft | 49.2 ft | 52.5 ft | 55.8 ft | 59.1 ft | 62.3 ft | 65.6 ft |
| 1475 lx  | 369 lx  | 164 lx  | 92 lx   | 59 lx   | 41 lx   | 30 lx   | 23 lx   | 18 lx   | 15 lx   | 12 lx   | 10 lx   | 9 lx    | 8 lx    | 7 lx    | 6 lx    | 5 lx    | 5 lx    | 4 lx    | 4 lx    |
| 137.0 fc | 34.2 fc | 15.2 fc | 8.6 fc  | 5.5 fc  | 3.8 fc  | 2.8 fc  | 2.1 fc  | 1.7 fc  | 1.4 fc  | 1.1 fc  | 1.0 fc  | 0.8 fc  | 0.7 fc  | 0.6 fc  | 0.5 fc  | 0.5 fc  | 0.4 fc  | 0.4 fc  | 0.3 fc  |

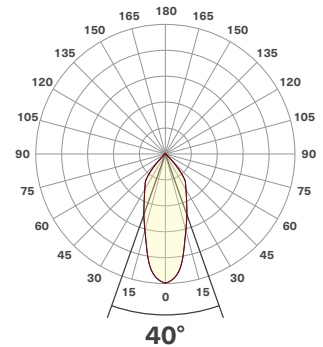

### LEDDW-511-55

|          |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |
|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 1 m      | 2 m     | 3 m     | 4 m     | 5 m     | 6 m     | 7 m     | 8 m     | 9 m     | 10 m    | 11 m    | 12 m    | 13 m    | 14 m    | 15 m    | 16 m    | 17 m    | 18 m    | 19 m    | 20 m    |
| 3.3 ft   | 6.6 ft  | 9.8 ft  | 13.1 ft | 16.4 ft | 19.7 ft | 23.0 ft | 26.2 ft | 29.5 ft | 32.8 ft | 36.1 ft | 39.4 ft | 42.7 ft | 45.9 ft | 49.2 ft | 52.5 ft | 55.8 ft | 59.1 ft | 62.3 ft | 65.6 ft |
| 1170 lx  | 293 lx  | 130 lx  | 73 lx   | 47 lx   | 33 lx   | 24 lx   | 18 lx   | 14 lx   | 12 lx   | 10 lx   | 8 lx    | 7 lx    | 6 lx    | 5 lx    | 5 lx    | 4 lx    | 4 lx    | 3 lx    | 3 lx    |
| 108.7 fc | 27.2 fc | 12.1 fc | 6.8 fc  | 4.3 fc  | 3.0 fc  | 2.2 fc  | 1.7 fc  | 1.3 fc  | 1.1 fc  | 0.9 fc  | 0.8 fc  | 0.6 fc  | 0.6 fc  | 0.5 fc  | 0.4 fc  | 0.4 fc  | 0.3 fc  | 0.3 fc  | 0.3 fc  |

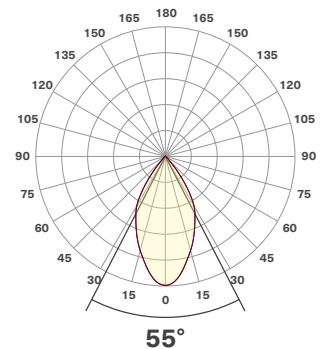

# Modular Multiples®


The Original Multiple Light Family of Fixtures



Available 70mm LED Modules

| Model Number <sup>1</sup> | Watts | Beam Angle | CRI | Lumens <sup>2</sup> | Lumens per watt | Tested K-Temp <sup>3</sup> |
|---------------------------|-------|------------|-----|---------------------|-----------------|----------------------------|
| LEDDW-713-20              | 13.3  | 20°        | 90+ | 1,224               | 92              | 3000K                      |
| LEDDW-713-30              | 13.3  | 30°        | 90+ | 1,213               | 91              | 3000K                      |
| LEDDW-713-40              | 13.3  | 40°        | 90+ | 1,148               | 86              | 3000K                      |
| LEDDW-713-55              | 13.3  | 55°        | 90+ | 1,182               | 89              | 3000K                      |
| LEDDW-719-20              | 19.3  | 20°        | 90+ | 1,747               | 91              | 3000K                      |
| LEDDW-719-30              | 19.3  | 30°        | 90+ | 1,735               | 90              | 3000K                      |
| LEDDW-719-40              | 19.3  | 40°        | 90+ | 1,650               | 85              | 3000K                      |
| LEDDW-719-55              | 19.4  | 55°        | 90+ | 1,715               | 88              | 3000K                      |
| LEDDW-726-20              | 26    | 20°        | 90+ | 2,217               | 85              | 3000K                      |
| LEDDW-726-30              | 24.9  | 30°        | 90+ | 2,216               | 85              | 3000K                      |
| LEDDW-726-40              | 25.1  | 40°        | 90+ | 2,149               | 86              | 3000K                      |
| LEDDW-726-55              | 25    | 55°        | 90+ | 2,227               | 86              | 3000K                      |
| LEDDW-730-20              | 30    | 20°        | 90+ | 2,539               | 85              | 3000K                      |
| LEDDW-730-30              | 30    | 30°        | 90+ | 2,493               | 83              | 3000K                      |
| LEDDW-730-40              | 30    | 40°        | 90+ | 2,379               | 79              | 3000K                      |
| LEDDW-730-55              | 30    | 55°        | 90+ | 2,491               | 83              | 3000K                      |

<sup>1</sup> Catalog specification example: LEDDW-730-55



<sup>2</sup> Lumen values are delivered lumen totals.

<sup>3</sup> Kelvin Temperature: 1800°K - 3000°K

# Modular Multiples®

The Original Multiple Light Family of Fixtures




Available 70mm LED Modules

## Beam Details

All information shown below measured with filter ring installed. Filter media and shielding options available.


### LEDDW-730-20

| 1m        | 2m       | 3m       | 4m      | 5m      | 6m      | 7m      | 8m      | 9m      | 10m     | 11m     | 12m     | 13m     | 14m     | 15m     | 16m     | 17m     | 18m     | 19m     | 20m     |
|-----------|----------|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 3.3 ft    | 6.6 ft   | 9.8 ft   | 13.1 ft | 16.4 ft | 19.7 ft | 23.0 ft | 26.2 ft | 29.5 ft | 32.8 ft | 36.1 ft | 39.4 ft | 42.7 ft | 45.9 ft | 49.2 ft | 52.5 ft | 55.8 ft | 59.1 ft | 62.3 ft | 65.6 ft |
| 14059 lx  | 3515 lx  | 1562 lx  | 879 lx  | 562 lx  | 391 lx  | 287 lx  | 220 lx  | 174 lx  | 141 lx  | 116 lx  | 98 lx   | 83 lx   | 72 lx   | 62 lx   | 55 lx   | 49 lx   | 43 lx   | 39 lx   | 35 lx   |
| 1306.2 fc | 326.5 fc | 145.1 fc | 81.6 fc | 52.2 fc | 36.3 fc | 26.7 fc | 20.4 fc | 16.1 fc | 13.1 fc | 10.8 fc | 9.1 fc  | 7.7 fc  | 6.7 fc  | 5.8 fc  | 5.1 fc  | 4.5 fc  | 4.0 fc  | 3.6 fc  | 3.3 fc  |

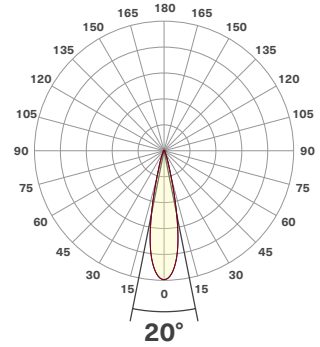


### LEDDW-730-30

| 1m       | 2m       | 3m      | 4m      | 5m      | 6m      | 7m      | 8m      | 9m      | 10m     | 11m     | 12m     | 13m     | 14m     | 15m     | 16m     | 17m     | 18m     | 19m     | 20m     |
|----------|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 3.3 ft   | 6.6 ft   | 9.8 ft  | 13.1 ft | 16.4 ft | 19.7 ft | 23.0 ft | 26.2 ft | 29.5 ft | 32.8 ft | 36.1 ft | 39.4 ft | 42.7 ft | 45.9 ft | 49.2 ft | 52.5 ft | 55.8 ft | 59.1 ft | 62.3 ft | 65.6 ft |
| 6199 lx  | 1550 lx  | 689 lx  | 387 lx  | 248 lx  | 172 lx  | 127 lx  | 97 lx   | 77 lx   | 62 lx   | 51 lx   | 43 lx   | 37 lx   | 32 lx   | 28 lx   | 24 lx   | 21 lx   | 19 lx   | 17 lx   | 15 lx   |
| 576.0 fc | 144.0 fc | 64.0 fc | 36.0 fc | 23.0 fc | 16.0 fc | 11.8 fc | 9.0 fc  | 7.1 fc  | 5.8 fc  | 4.8 fc  | 4.0 fc  | 3.4 fc  | 2.9 fc  | 2.6 fc  | 2.2 fc  | 2.0 fc  | 1.8 fc  | 1.6 fc  | 1.4 fc  |

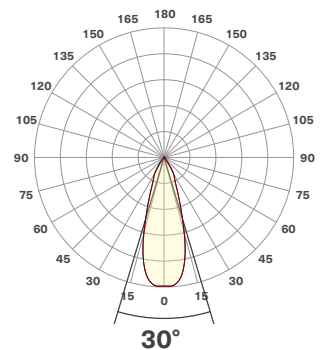


### LEDDW-730-40

| 1m       | 2m      | 3m      | 4m      | 5m      | 6m      | 7m      | 8m      | 9m      | 10m     | 11m     | 12m     | 13m     | 14m     | 15m     | 16m     | 17m     | 18m     | 19m     | 20m     |
|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 3.3 ft   | 6.6 ft  | 9.8 ft  | 13.1 ft | 16.4 ft | 19.7 ft | 23.0 ft | 26.2 ft | 29.5 ft | 32.8 ft | 36.1 ft | 39.4 ft | 42.7 ft | 45.9 ft | 49.2 ft | 52.5 ft | 55.8 ft | 59.1 ft | 62.3 ft | 65.6 ft |
| 4096 lx  | 1024 lx | 455 lx  | 256 lx  | 164 lx  | 114 lx  | 84 lx   | 64 lx   | 51 lx   | 41 lx   | 34 lx   | 28 lx   | 24 lx   | 21 lx   | 18 lx   | 16 lx   | 14 lx   | 13 lx   | 11 lx   | 10 lx   |
| 380.5 fc | 95.1 fc | 42.3 fc | 23.8 fc | 15.2 fc | 10.6 fc | 7.8 fc  | 5.9 fc  | 4.7 fc  | 3.8 fc  | 3.1 fc  | 2.6 fc  | 2.3 fc  | 1.9 fc  | 1.7 fc  | 1.5 fc  | 1.3 fc  | 1.2 fc  | 1.1 fc  | 1.0 fc  |

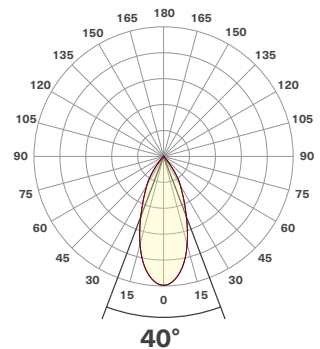

### LEDDW-730-55

| 1m       | 2m      | 3m      | 4m      | 5m      | 6m      | 7m      | 8m      | 9m      | 10m     | 11m     | 12m     | 13m     | 14m     | 15m     | 16m     | 17m     | 18m     | 19m     | 20m     |
|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 3.3 ft   | 6.6 ft  | 9.8 ft  | 13.1 ft | 16.4 ft | 19.7 ft | 23.0 ft | 26.2 ft | 29.5 ft | 32.8 ft | 36.1 ft | 39.4 ft | 42.7 ft | 45.9 ft | 49.2 ft | 52.5 ft | 55.8 ft | 59.1 ft | 62.3 ft | 65.6 ft |
| 3343 lx  | 836 lx  | 371 lx  | 209 lx  | 134 lx  | 93 lx   | 68 lx   | 52 lx   | 41 lx   | 33 lx   | 28 lx   | 23 lx   | 20 lx   | 17 lx   | 15 lx   | 13 lx   | 12 lx   | 10 lx   | 9 lx    | 8 lx    |
| 310.6 fc | 77.7 fc | 34.5 fc | 19.4 fc | 12.4 fc | 8.6 fc  | 6.3 fc  | 4.9 fc  | 3.8 fc  | 3.1 fc  | 2.6 fc  | 2.2 fc  | 1.8 fc  | 1.6 fc  | 1.4 fc  | 1.2 fc  | 1.1 fc  | 1.0 fc  | 0.9 fc  | 0.8 fc  |

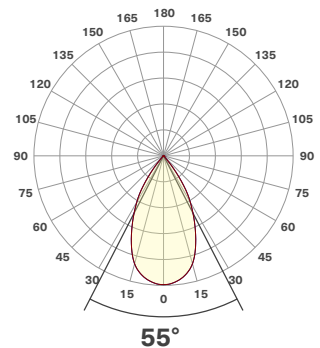

# Modular Multiples®

The Original Multiple Light Family of Fixtures




Available 90mm LED Modules



| Model Number <sup>1</sup> | Watts | Beam Angle | CRI | Lumens <sup>2</sup> | Lumens per watt | Tested K-Temp <sup>3</sup> |
|---------------------------|-------|------------|-----|---------------------|-----------------|----------------------------|
| <b>LEDDW-936-30</b>       | 36    | 30°        | 90+ | 3,032               | 84              | 3000K                      |
| <b>LEDDW-936-45</b>       | 36    | 45°        | 90+ | 3,018               | 84              | 3000K                      |
| <b>LEDDW-936-55</b>       | 36    | 55°        | 90+ | 3,090               | 86              | 3000K                      |
| <b>LEDDW-936-90</b>       | 36    | 90°        | 90+ | 3,157               | 88              | 3000K                      |
| <b>LEDDW-940-30</b>       | 40    | 30°        | 90+ | 3,325               | 83              | 3000K                      |
| <b>LEDDW-940-45</b>       | 40    | 45°        | 90+ | 3,308               | 83              | 3000K                      |
| <b>LEDDW-940-55</b>       | 40    | 55°        | 90+ | 3,428               | 86              | 3000K                      |
| <b>LEDDW-940-90</b>       | 40    | 90°        | 90+ | 3,449               | 86              | 3000K                      |

<sup>1</sup> Catalog specification example: LEDDW-940-90




<sup>2</sup> Lumen values are delivered lumen totals.

<sup>3</sup> Kelvin Temperature: 1800°K - 3000°K

## Filter Ring / Shielding Cylinder / Filter Media

Applicable to all Modular LED modules.

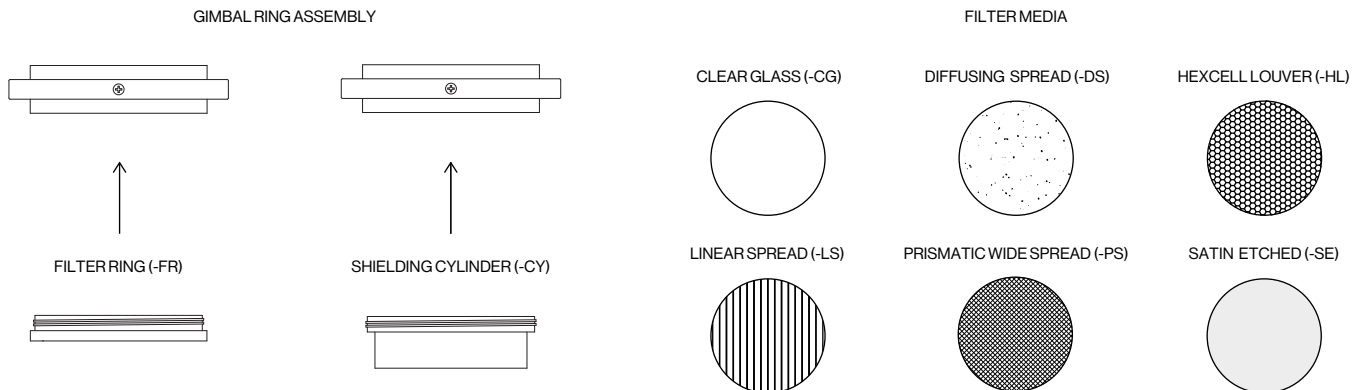

# Modular Multiples®

The Original Multiple Light Family of Fixtures



Available 90mm LED Modules




## Beam Details

All information shown below measured with filter ring installed. Filter media and shielding options available.


### LEDDW-940-30

| 1m       | 2m       | 3m      | 4m      | 5m      | 6m      | 7m      | 8m      | 9m      | 10m     | 11m     | 12m     | 13m     | 14m     | 15m     | 16m     | 17m     | 18m     | 19m     | 20m     |
|----------|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 3.3 ft   | 6.6 ft   | 9.8 ft  | 13.1 ft | 16.4 ft | 19.7 ft | 23.0 ft | 26.2 ft | 29.5 ft | 32.8 ft | 36.1 ft | 39.4 ft | 42.7 ft | 45.9 ft | 49.2 ft | 52.5 ft | 55.8 ft | 59.1 ft | 62.3 ft | 65.6 ft |
| 6157 lx  | 1539 lx  | 684 lx  | 385 lx  | 246 lx  | 171 lx  | 126 lx  | 96 lx   | 76 lx   | 62 lx   | 51 lx   | 43 lx   | 36 lx   | 31 lx   | 27 lx   | 24 lx   | 21 lx   | 19 lx   | 17 lx   | 15 lx   |
| 572.0 fc | 143.0 fc | 63.6 fc | 35.8 fc | 22.9 fc | 15.9 fc | 11.7 fc | 8.9 fc  | 7.1 fc  | 5.7 fc  | 4.7 fc  | 4.0 fc  | 3.4 fc  | 2.9 fc  | 2.5 fc  | 2.2 fc  | 2.0 fc  | 1.8 fc  | 1.6 fc  | 1.4 fc  |

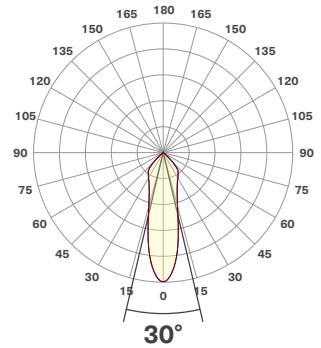


### LEDDW-940-45

| 1m       | 2m      | 3m      | 4m      | 5m      | 6m      | 7m      | 8m      | 9m      | 10m     | 11m     | 12m     | 13m     | 14m     | 15m     | 16m     | 17m     | 18m     | 19m     | 20m     |
|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 3.3 ft   | 6.6 ft  | 9.8 ft  | 13.1 ft | 16.4 ft | 19.7 ft | 23.0 ft | 26.2 ft | 29.5 ft | 32.8 ft | 36.1 ft | 39.4 ft | 42.7 ft | 45.9 ft | 49.2 ft | 52.5 ft | 55.8 ft | 59.1 ft | 62.3 ft | 65.6 ft |
| 4042 lx  | 1011 lx | 449 lx  | 253 lx  | 162 lx  | 126 lx  | 82 lx   | 63 lx   | 50 lx   | 40 lx   | 33 lx   | 28 lx   | 24 lx   | 21 lx   | 18 lx   | 16 lx   | 14 lx   | 12 lx   | 11 lx   | 10 lx   |
| 375.5 fc | 93.9 fc | 41.7 fc | 23.5 fc | 15.0 fc | 10.4 fc | 7.7 fc  | 5.9 fc  | 4.6 fc  | 3.8 fc  | 3.1 fc  | 2.6 fc  | 2.2 fc  | 1.9 fc  | 1.7 fc  | 1.5 fc  | 1.3 fc  | 1.2 fc  | 1.0 fc  | 0.9 fc  |

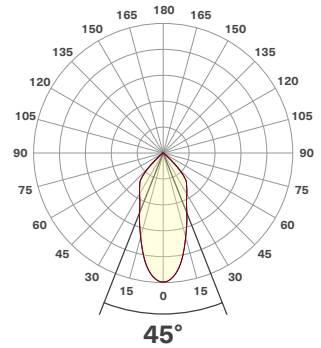


### LEDDW-940-55

| 1m       | 2m      | 3m      | 4m      | 5m      | 6m      | 7m      | 8m      | 9m      | 10m     | 11m     | 12m     | 13m     | 14m     | 15m     | 16m     | 17m     | 18m     | 19m     | 20m     |
|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 3.3 ft   | 6.6 ft  | 9.8 ft  | 13.1 ft | 16.4 ft | 19.7 ft | 23.0 ft | 26.2 ft | 29.5 ft | 32.8 ft | 36.1 ft | 39.4 ft | 42.7 ft | 45.9 ft | 49.2 ft | 52.5 ft | 55.8 ft | 59.1 ft | 62.3 ft | 65.6 ft |
| 3705 lx  | 926 lx  | 412 lx  | 232 lx  | 148 lx  | 103 lx  | 76 lx   | 58 lx   | 46 lx   | 37 lx   | 31 lx   | 26 lx   | 22 lx   | 19 lx   | 16 lx   | 14 lx   | 13 lx   | 11 lx   | 10 lx   | 9 lx    |
| 344.2 fc | 86.1 fc | 38.2 fc | 21.5 fc | 13.8 fc | 9.6 fc  | 7.0 fc  | 5.4 fc  | 4.2 fc  | 3.4 fc  | 2.8 fc  | 2.4 fc  | 2.0 fc  | 1.8 fc  | 1.5 fc  | 1.3 fc  | 1.2 fc  | 1.1 fc  | 1.0 fc  | 0.9 fc  |

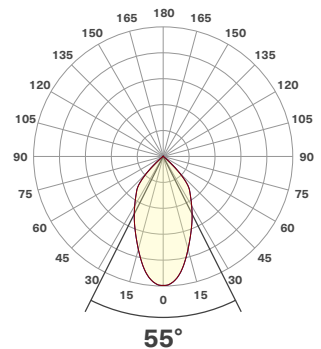

### LEDDW-940-90

| 1m       | 2m      | 3m      | 4m      | 5m      | 6m      | 7m      | 8m      | 9m      | 10m     | 11m     | 12m     | 13m     | 14m     | 15m     | 16m     | 17m     | 18m     | 19m     | 20m     |
|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 3.3 ft   | 6.6 ft  | 9.8 ft  | 13.1 ft | 16.4 ft | 19.7 ft | 23.0 ft | 26.2 ft | 29.5 ft | 32.8 ft | 36.1 ft | 39.4 ft | 42.7 ft | 45.9 ft | 49.2 ft | 52.5 ft | 55.8 ft | 59.1 ft | 62.3 ft | 65.6 ft |
| 1953 lx  | 488 lx  | 217 lx  | 122 lx  | 78 lx   | 54 lx   | 40 lx   | 31 lx   | 24 lx   | 20 lx   | 16 lx   | 14 lx   | 12 lx   | 10 lx   | 9 lx    | 8 lx    | 7 lx    | 6 lx    | 5 lx    | 5 lx    |
| 181.5 fc | 45.4 fc | 20.2 fc | 11.3 fc | 7.3 fc  | 5.0 fc  | 3.7 fc  | 2.8 fc  | 2.2 fc  | 1.8 fc  | 1.5 fc  | 1.3 fc  | 1.1 fc  | 0.9 fc  | 0.8 fc  | 0.7 fc  | 0.6 fc  | 0.6 fc  | 0.5 fc  | 0.5 fc  |

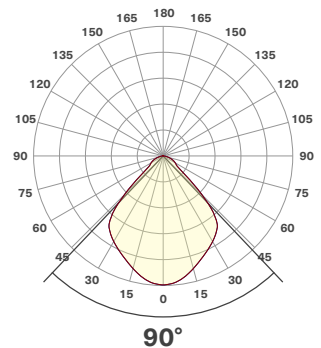

50mm, 70mm,  
and 90mm LED  
modules available  
with filter rings,  
shielding cylinders,  
and filter media.

# Modular International, Inc.

